

→ W.NR.:	1.2080 (EN ISO 4957)
→ EN / DIN:	X210Cr12
→ AISI:	~ D3

→ CHEMICAL COMPOSITION (W%)

C	Si	Mn	Cr
2.05	0.25	0.30	11.50

→ DELIVERY CONDITION: soft annealed with a hardness of <248 HB

→ PROCESS: conventional

→ HEAT TREATMENT

soft annealing	cooling	hardness (HB)
800-840	furnace	<248
hardening	quenching	hardness (HRC)
940-980 °C (oil), 960-1000 °C (air)	air, oil, warm bath 400 °C	63-66

→ PROPERTIES

This is a high-carbon ledeburite steel with a medium hardening toughness in oil. It is highly wear-resistant and has a medium tempering resistance. This steel does not have a secondary tempering peak. Dimensionally stable after heat treatment and with high compressive strength. PVD and nitrite can be applied, although this is not recommended. Erosion is not recommended. This steel is vulnerable to rapid warming in heat treatment.

→ APPLICATION


Tool steel for cold applications. It is used for cutting and forming tools for thin but harder metal sheet (up to 4 mm), for woodworking tools. Tools for drawing, deep drawing, pressing, profile rolling (profiles, tubes). For measuring tools. For the pressing of metal powders and ceramics. Tools for screws production. Tools for the cold extrusion of light metals. Different blades for paper. Working hardness of about 58 to 62 HRC.

→ ULTRASOUND EXAMINATION


EN 10228-3 art.2-4

COLD WORK TOOL STEEL

tt

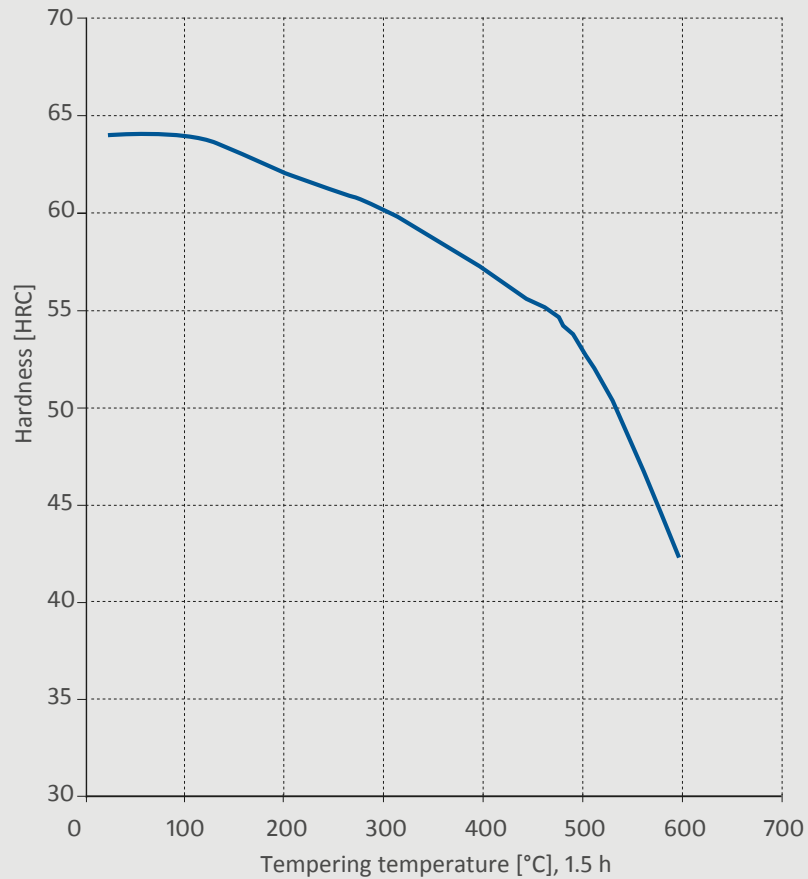

cct

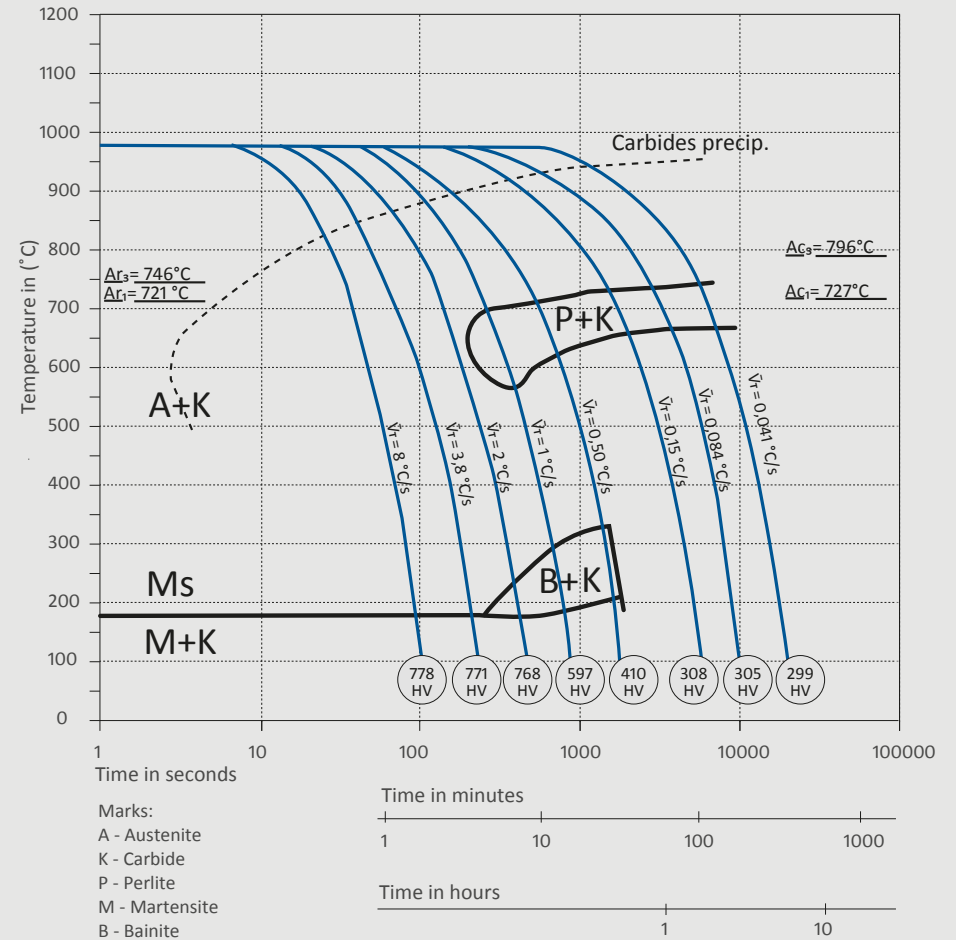

DISCLAIMER

The information and data presented herein are typical or average values and are not a guarantee of maximum or minimum values. Applications specifically suggested for material described herein are made solely for the purpose of illustration to enable the reader to make his own evaluation and are not intended as warranties, either express or implied, of fitness for these or other purposes. There is no representation that the recipient of this literature will receive updated editions as the become available.